


SINGLE SIDED ANGLE HEAD – PREMIUM LINE MONO R AT REDUCED SPEED

TECHNICAL DATA

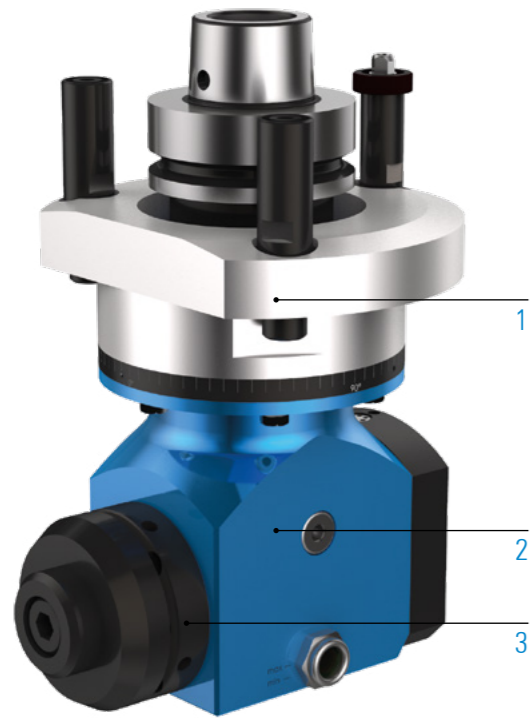

Lubrication
Max. drive speed n_2
Transmission ratio ($n_1: n_2$)
Max. drive torque M_2
Weight

Oil bath
8,000 rpm
1:0.8
25 Nm
about 5.5 kg





STANDARD DESIGN

- 1  Machine Connection
HSK - F63
- 2  Head length
M
- 3  Output spindle
Arbor $\varnothing 30$, tool length 1,5–6 mm

MACHINING

-  Drilling
-  Milling
-  Sawing

SPECIFICATIONS

-  1 Number of output spindles
-  90° Axis angle
-  360° C-angle
-  Oil bath lubrication

VIDEO



Angle head - live in the application
Scan QR code or go to:
www.youtube.com/BENZtooling

TECHNICAL DRAWING



ADDITIONAL OPTIONS: MODULAR DESIGN

1



MACHINE CONNECTION



2



HEAD LENGTH



3



OUTPUT SPINDLE

